


KIT DIG Terza 1F



CE

KIT DIG Terza 1F

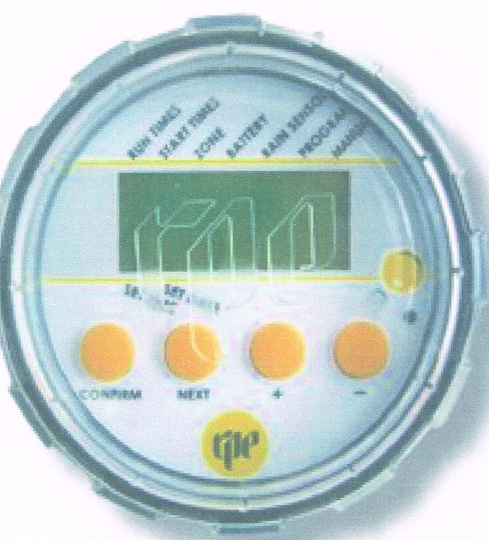

Kit for watering gardens or small to medium sized fields.

This kit is composed by 1 DIG controller and Third Series solenoid valve 1" female.

Flow rate 250 L/min (15 m³/hour) ---> 66.04 U.S. GAL/min.

Dimensions 128 x 128 x 90 mm.

Voltage:	9V battery
Battery life:	1 year
Control:	Icon that indicates battery charge status, and stop when there is not charge enough
Body:	Waterproof I.P. 68
Sensors:	Pre-set for rain sensors, humidity sensors, wind sensors, ice sensors, (Mini Click sensors)
Installation:	Outside, in sumps
Mode selection:	Graphic display and 4 buttons
Irrigation:	Programmable from 1 minute to 19 hours and 59 minutes, or manual
Timing:	Water cycling programmes including a weekly calendar
Starting:	From 1 to 10 starts per day
Solenoid Valve:	1" F, BSP, manual override by means of solenoid coil rotation, without flow regulator
Sizes:	Controller: 80 mm diameter, 65 mm deep - Solenoid valve: 128 x 128 x 90 mm
Kv:	250 L/min (15 m ³ /hour) ---> 66.04 U.S. GAL/min.

CERTIFICAZIONI / CERTIFICATIONS

